



**10.1 inch TFT LCD
Without Touch Panel
SPECIFICATION
MODEL NAME: LMWC5101XX61**

Date: 2024/10/25

Customer Signature		
Customer		
Approved Date	Approved By	Reviewed By

CONTENTS

1. RECORD OF REVISION	1
2. MECHANICAL SPECIFICATIONS	2
3. OUTLINE DIMENSIONS	3
4. INTERFACE PIN CONNECTION	4
5. BLOCK DIAGRAM	5
6. ABSOLUTE MAXIMUM RATINGS	6
7. ELECTRICAL CHARACTERISTICS	7
8. OPTICAL CHARACTERISTICS	9
9. TOUCH PANEL SPECIFICATIONS	12
10. TIMING SPECIFICATIONS	13
11. RELIABILITY TEST	16
12. PRECAUTIONS FOR USE	17



1. RECORD OF REVISION

Rev	DATE	PAGE	SUMMARY
P00	2024.10.25	ALL	Preliminary specification was issued




2. MECHANICAL SPECIFICATIONS

(1)	Number of Dots	1280(R.G.B) x 800
(2)	Module Size(mm)	229.46(H) x 149.1(V) x 7.7 (D)
(3)	Active Area(mm)	216.96(H) x 135.60(V)
(4)	Pixel Pitch(mm)	0.1695(H) x 0.1695(V)
(5)	LCD Model	TFT, Transmissive, Normally Black
(6)	Backlight Color	White
(7)	Viewing Direction	Wide View Angle
(8)	Electrical Interface	LVDS Interface
(9)	Color Configuration	R.G.B Vertical Stripe
(10)	Touch Panel Mode	Without Touch
(11)	Module Weight(g)	278±5%




Specification:

1. Size: 10, 1"
2. Resolution: 1280x800
3. Interface: LVDS
4. Operating Voltage: 3.3V for LCD / 12V for B/L
5. Operating Temp.: -20° C~+70° C
6. Storage Temp.: -30° C~+80° C
7. Without tolerance marked: $\pm 0.3\text{mm}$.

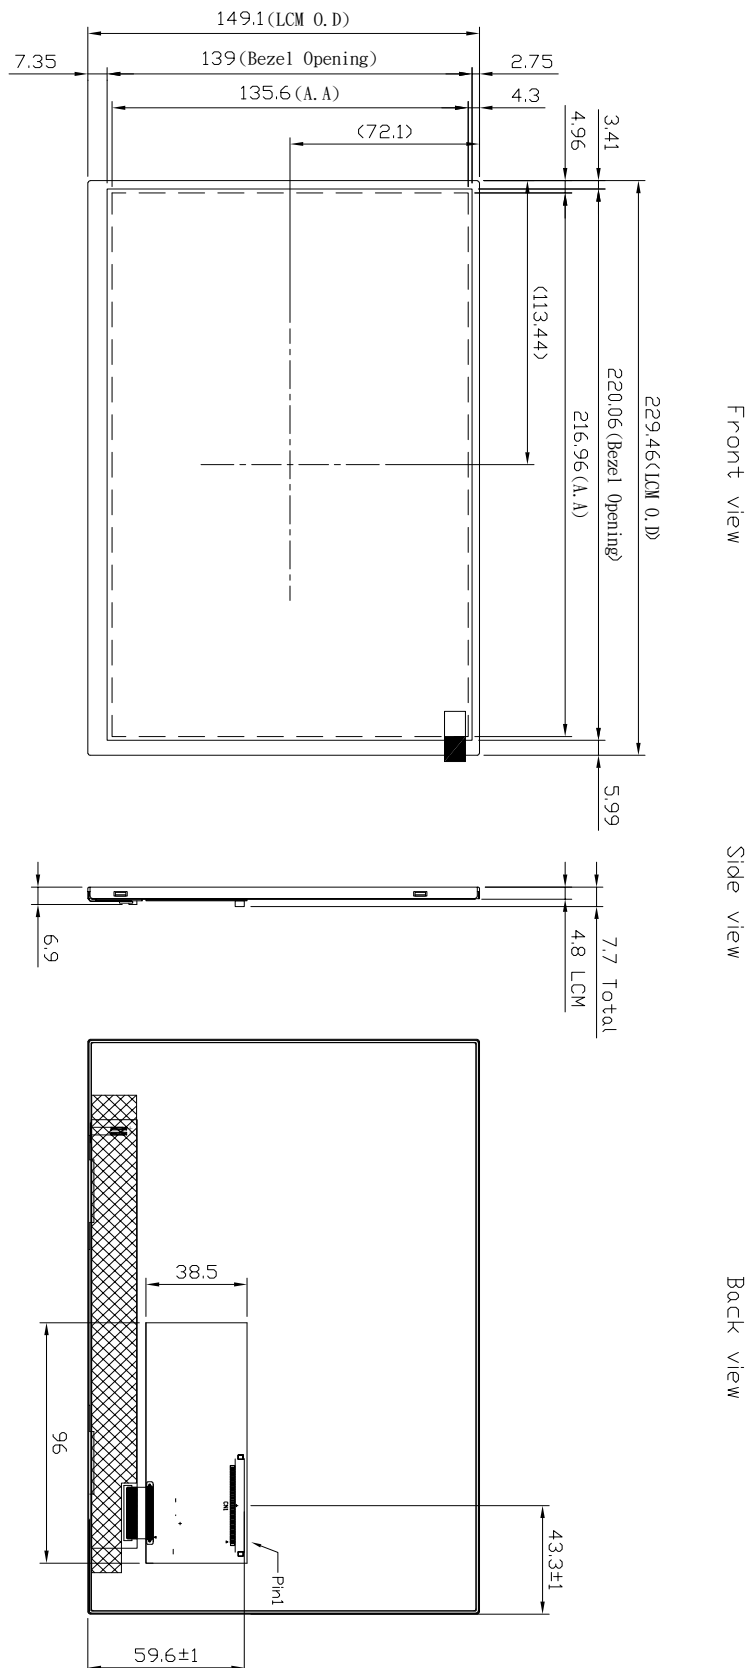

6		7		8	
NO.	Revised Area	Revised Content	Made	Date	
		New Released			

Part Name	Part No.		Scale: 1 : 1
Material	Quantity		
Unit	Weight		
Code	Outline Drawing		Product No:
App			

4. INTERFACE PIN CONNECTION

4.1 TFT LCM PANEL PIN DEFINE


CN1 Connector : STM MSBK2407P30 RF:HB or Equivalent

PIN NO.	Definition	I/O	Description	Remark
1	GND	P	Ground	
2	GND	P	Ground	
3	EN	I	Enable Control for Backlight	
4	PWM	I	Brightness Control for Backlight	
5	VLED	P	Power Supply for LED Backlight	
6	VLED	P	Power Supply for LED Backlight	
7	VDD	P	Power Supply for Digital Circuit (3.3V)	
8	NC	-	No connection	
9	NC	-	No connection	
10	GND	P	Ground	
11	RxIN0-	I	Negative LVDS Differential Data Input	
12	RxIN0+	I	Positive LVDS Differential Data Input	
13	GND	P	Ground	
14	RxIN1-	I	Negative LVDS Differential Data Input	
15	RxIN1+	I	Positive LVDS Differential Data Input	
16	GND	P	Ground	
17	RxIN2-	I	Negative LVDS Differential Data Input	
18	RxIN2+	I	Positive LVDS Differential Data Input	
19	GND	P	Ground	
20	RxCLK-	I	Negative LVDS Differential Clock Input	
21	RxCLK+	I	Positive LVDS Differential Clock Input	
22	GND	P	Ground	
23	RxIN3-	I	Negative LVDS Differential Data Input	
24	RxIN3+	I	Positive LVDS Differential Data Input	
25	NC	-	No connection	
26	NC	-	No connection	
27	NC	-	No connection	
28	NC	-	No connection	
29	NC	-	No connection	
30	NC	-	No connection	

Note : 'P' stand for Power, 'I' stand for Input



5. BLOCK DIAGRAM

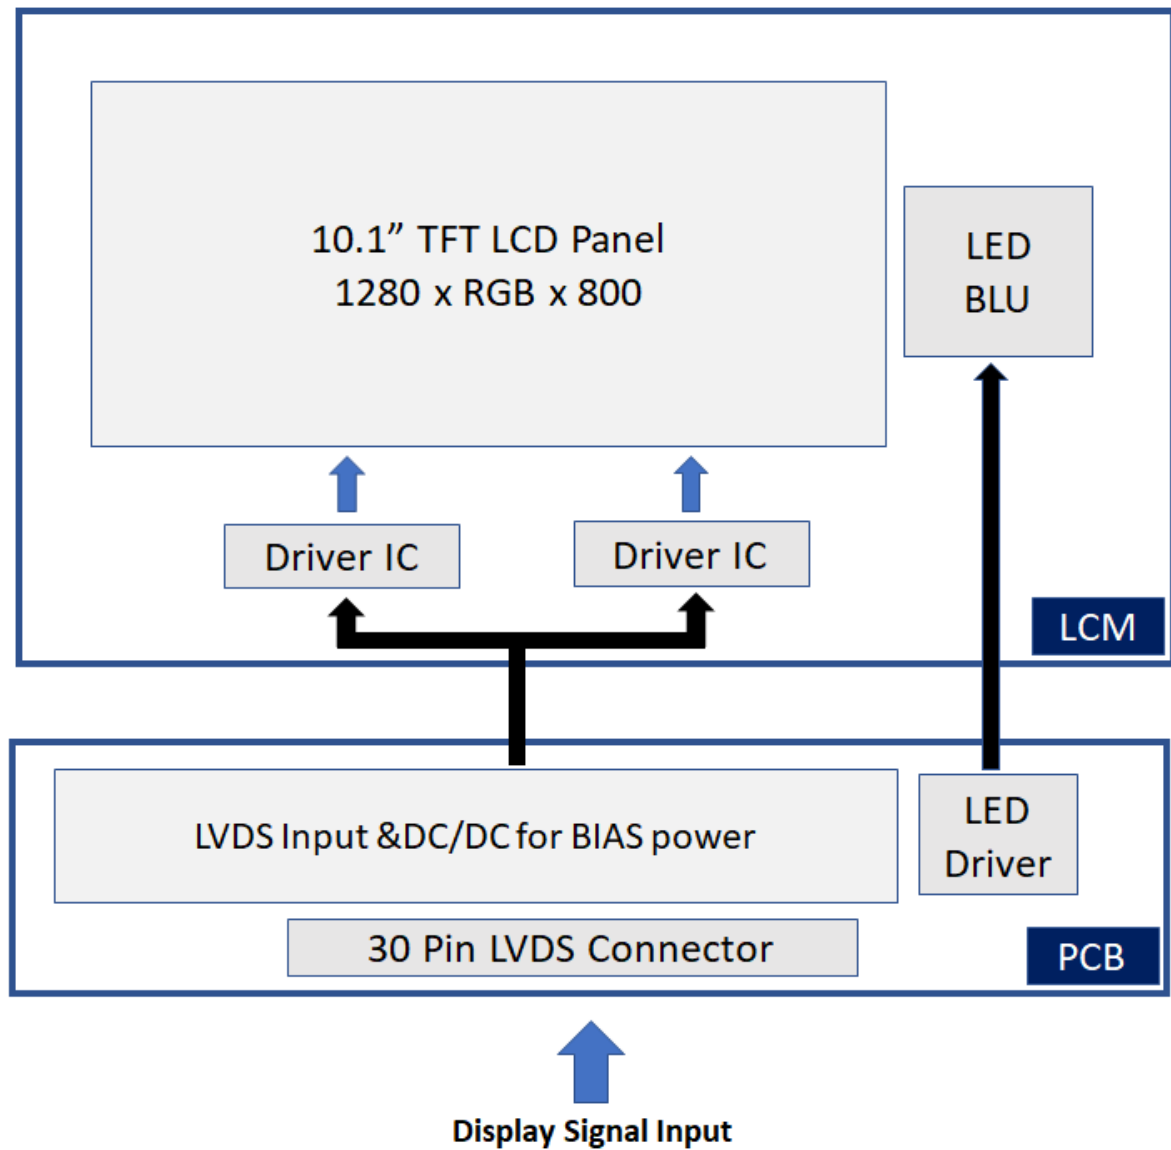

6. ABSOLUTE MAXIMUM RATINGS

6.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS

ITEM	SYMBOL	MIN.	MAX.	UNIT	REMARK
Power Supply Voltage	VDD	-0.3	4	V	

Note : The absolute maximum rating values of this product not allowed to be Exceeded at any times. Should be module be used with any of absolute maximum ratings exceeded. The characteristics of the module may not be recovered, or in an extreme case, the module may be permanently destroyed.

6.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

ITEM	OPERATING		STORAGE		REMARK
	MIN.	MAX.	MIN.	MAX.	
Ambient Temperature(°C)	-20	70	-30	80	Note 1,2
Humidity(% RH)	10~90		10~90		-

Note 1 : The response time will become lower when operated at low temperature.

Note 2 : Background color changes slightly depending on ambient temperature.



7. ELECTRICAL CHARACTERISTICS

7.1 ELECTRICAL CHARACTERISTICS OF LCD


Ta=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Power Voltage For LCD	VDD	3.0	3.3	3.6	V	
	IDD	-	(300)	-	mA	Note1
Differential Input Threshold	VTH	-	-	+100	mV	Note2
	VTL	-100	-	-	mV	
Magnitude Differential Input	V _{ID}	100		600	mV	
Common Mode Voltage	V _{CM}	0.7	-	1.6	V	

Note 1 : Test Condition: VDD=3.3V ; Test Pattern: White.

Note 2 : VTH and VTL is defined in RxIN0+/- 、RxIN1+/- 、RxIN2+/- 、RxIN3+/- 、CLKIN+/- signal voltage level.

Single-end signals

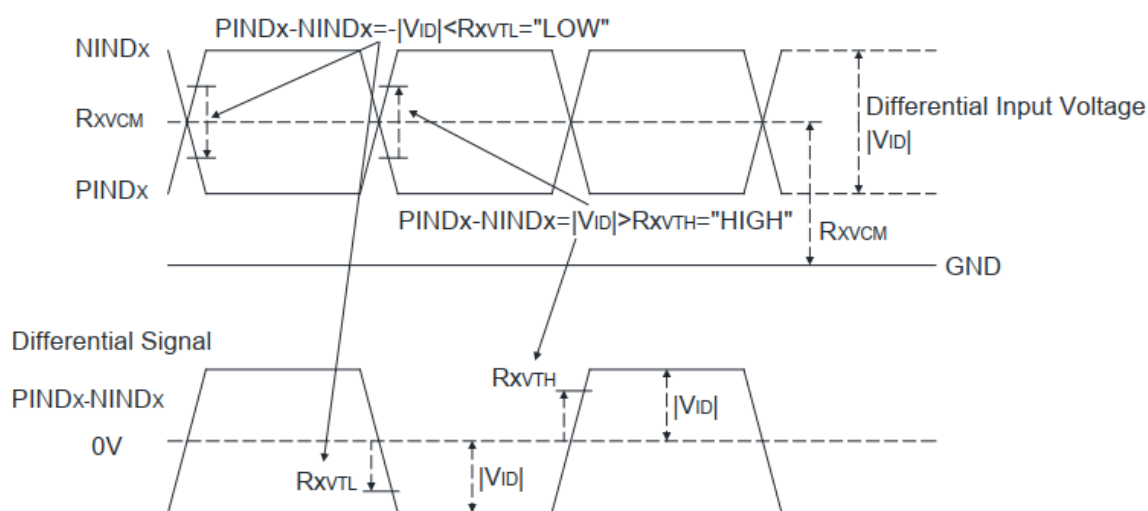

7.2 BACKLIGHT UNITS

Ta=25°C

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
Forward Voltage	VLED	11.5	12	12.5	V	
Forward Current	ILED	-	250	-	mA	VLED=12V
Brightness Control	High	1.2	-	-	V	
	Low	0	-	0.4	V	
PWM Frequency	-	200		1000	Hz	
LED Life Time	Lf	30,000	50,000	-	Hrs	

Note 1 : The lifetime of LED is defined as the time when it continues to operate under the conditions at Ta= 25 ±2°C and PWM = 100% (LED forward current) until the brightness becomes ≤50% of its original value.



8. OPTICAL CHARACTERISTICS

8.1 Optical specification

Ta=25°C

ITEM		SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT	REMARK
Contrast Ratio		CR	Viewing Normal Angle Θx=Θy=0°	600	800	-	-	Note 1
Response Time		Tr+Tf		-	25	50	ms	Note 2
Color Chromaticity	White	Wx		0.26	0.31	0.36		Note 4
		Wy		0.28	0.33	0.38		
Viewing Angle	Hor.	θL	Viewing Angle Θx=Θy=0°	75	85	-	Deg.	Note 4
		θR		75	85	-		
	Ver.	θU	75	85	-			
		θD	75	85	-			
Luminance(Center)		L	PWM=100%	500	600	-	cd/m²	Center
Luminance Uniformity		YU		70	75	-	%	Note 5

Note 1 : Definition of Contrast Ratio (CR) :

The contrast ratio can be calculated by the following expression.

Contrast Ratio (CR) = L63/L0


L63 : Luminance of gray level 63

L0 : Luminance of gray level 0


CR = CR(5)

CR(X) is corresponding to the Contrast Ratio of the point X at Figure in Note 5

Note 2 : Definition of Response Time (TR.TF)

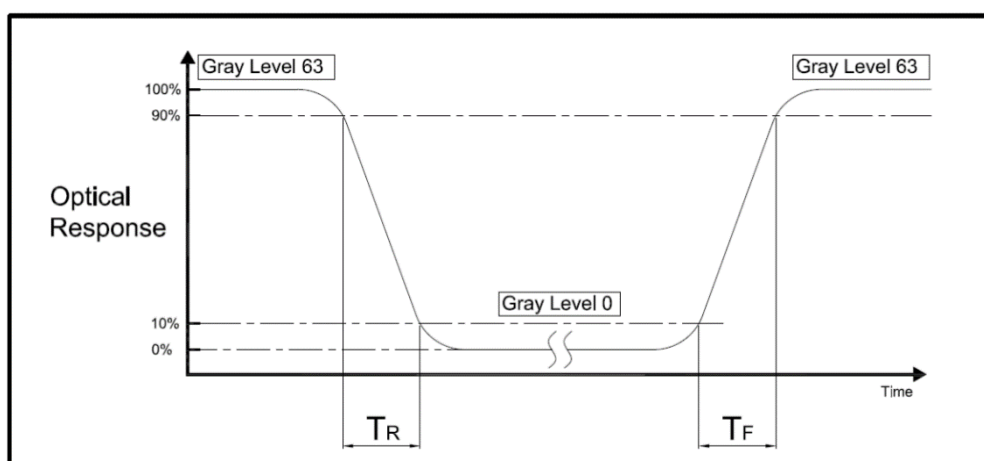


Note 3 : Definition of Viewing Angle

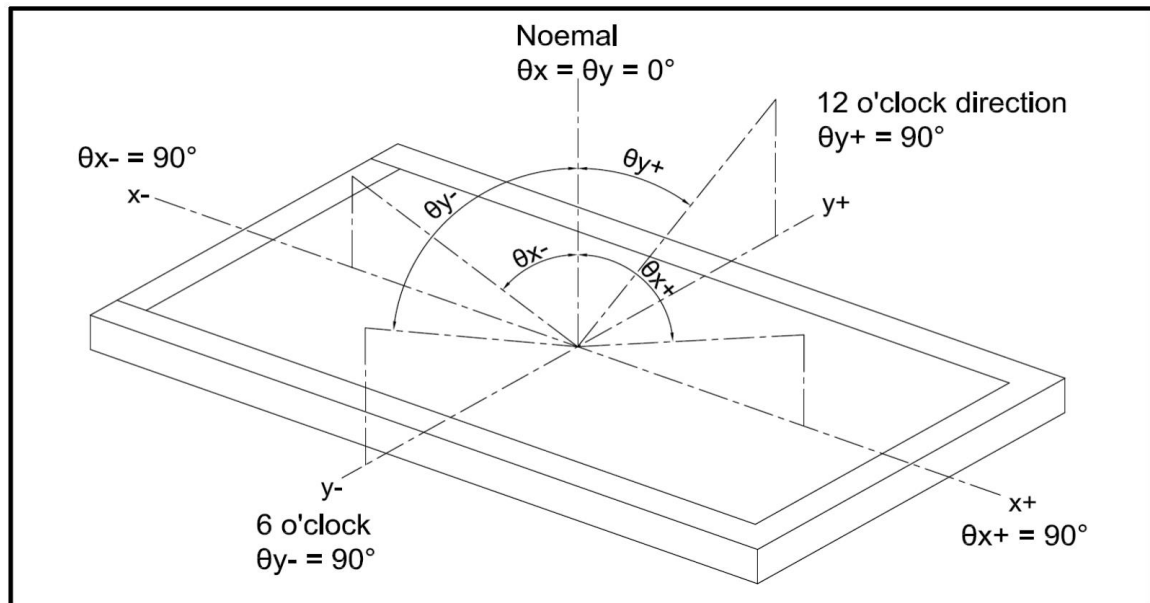


Note 4 : Measurement Set-Up:

The LCD module should be stabilized at a given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room.

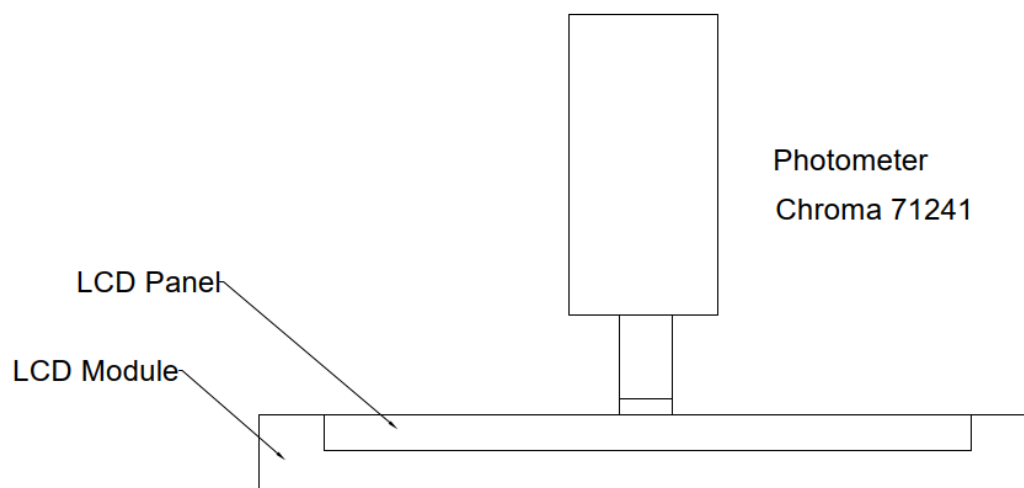

Note 5: Definition of uniformity (Un)

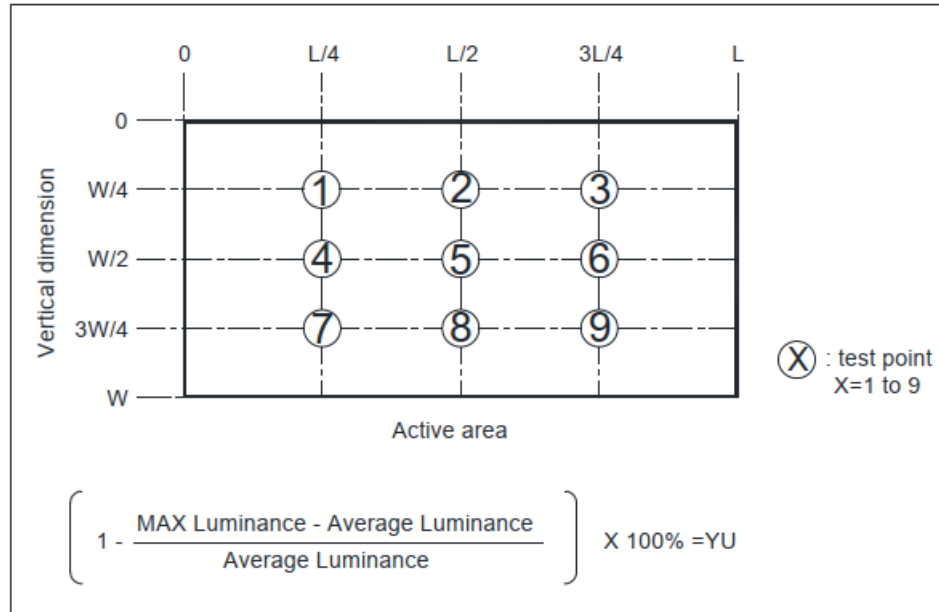

9. TOUCH PANEL SPECIFICATIONS

9.1 Type :

9.2 STRUCTURE :

9.2.1 Thickness :

9.3 IC MODEL :

9.3.1 IC manufacture :

9.3.2 IC part number :

9.3.3 Interface :

9.4 ELECTRICAL CHARACTERISTICS :

9.4.1 Operating Voltage :

9.5 MECHANICAL CHARACTERISTICS :

9.5.1 Surface hardness :


9.6 OPTICAL CHARACTERISTICS :

9.6.1 Transparency :

9.6.2 Haze:

10. TIMING SPECIFICATIONS

10.1 Power on/off Sequence

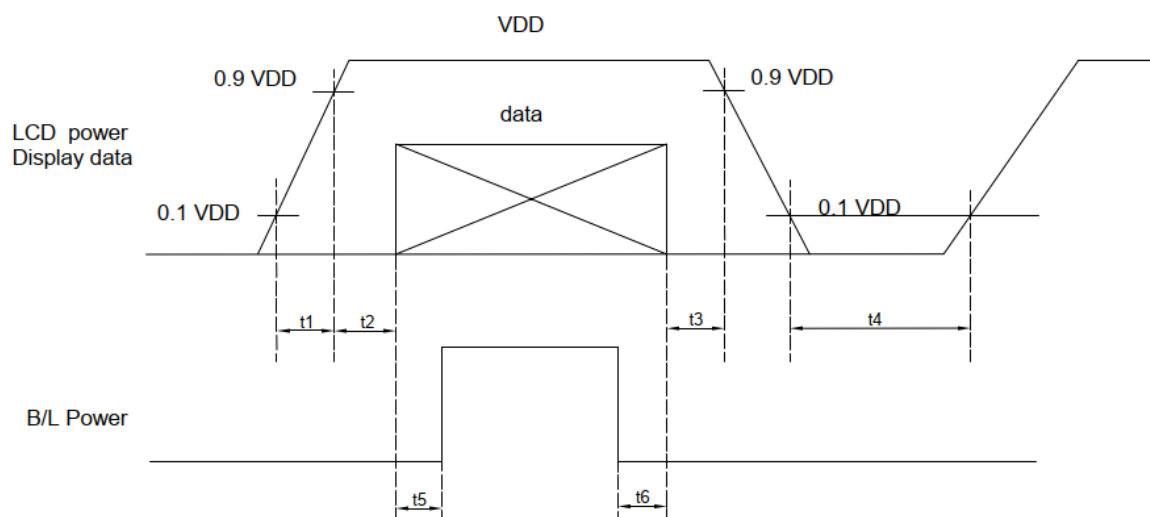



ITEM	MIN.	MAX.	NOTE
t1	0.5	10	
t2	0	50	
t3	0	50	
t4	200	-	
t5	200	-	
t6	0	-	

UNIT: ms




10.2 Timing Table

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	NOTE
DCLK frequency	1/Tc	63.4	64.5	85.0	MHz	Frame rate=60Hz
Horizontal Display area	tHD	1280			Tc	
HS period time	tH	1309	1322	1664	Tc	
HS width+ Back Porch +Front Porch	tHW+ Thbp+ tHFP	29	42	384	Tc	
Vertical display area	tVD	800			tH	
VS period time	tV	807	813	1040	tH	
VS width+ Back Porch + Front Porch	tVW+tVBP+tVFP	7	13	240	tH	

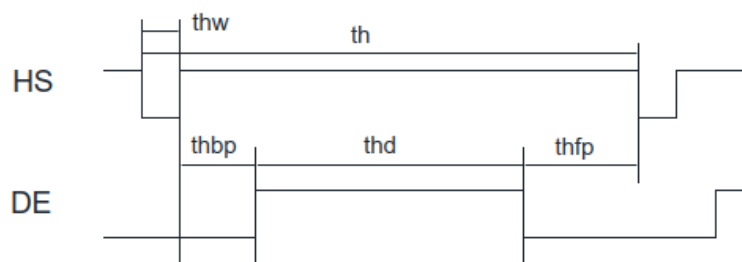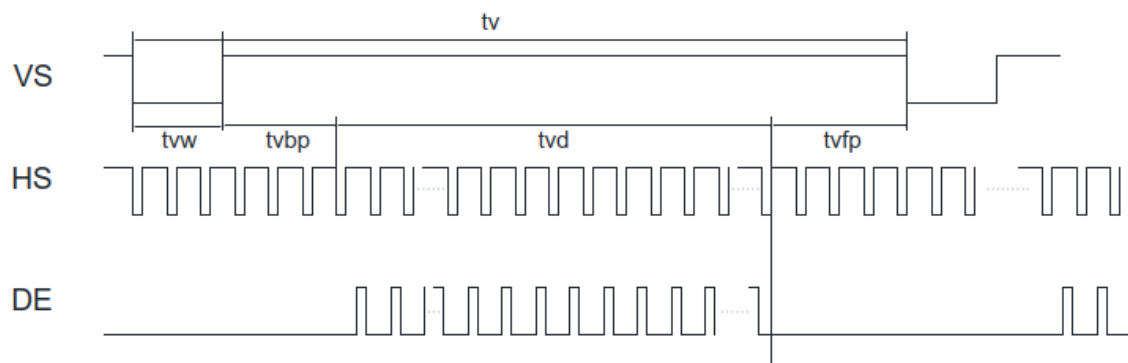

10.3 Data Input Format

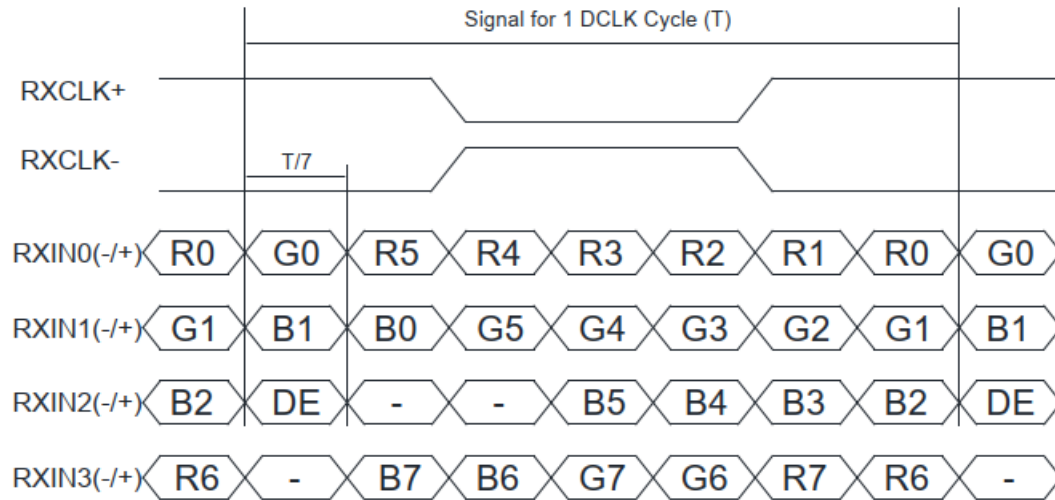

11. RELIABILITY TEST

ENVIRONMENTAL TEST				
NO.	ITEM	CONDITIONS	TIME PERIOD	REMARK
1	High Temperature Storage	Ta= 80°C	240Hours	1,2,3,4
2	Low Temperature Storage	Ta= -30°C	240Hours	1,2,3,4
3	High Temperature Humidity Storage	40°C,90%RH	240Hours	1,2,3,4
4	High Temperature Operation	Ts= 70°C	240Hours	1,2,3,4
5	Low Temperature Operation	Ta= -20°C	240Hours	1,2,3,4,5
6	Temperature Cycle	-20°C~70°C (30min) (30min)	100 CYCLES	1,2,3

In the standard condition, there shall be no practical problem that may affect the display function. After the reliability test, the product only guarantees operation, but don't guarantee all of the cosmetic specification.

Note 1 : Ta is the ambient temperature of samples.

Note 2 : Ts is the temperature of panel's surface.

Note 3 : Before cosmetic and function test, the product must have enough recovery time, at least 2 hours at room temperature.

Note 4 : Star with cold temperature and end with high temperature.

12. PRECAUTIONS FOR USE

14.1 SAFETY

- (1) Do not swallow any liquid crystal, even if there is no proof that liquid crystal is poisonous.
- (2) If the LCD panel breaks, be careful not to get liquid crystal to touch your skin.
- (3) If skin is exposed to liquid crystal, wash the area thoroughly with alcohol or soap.

14.2 STORAGE CONDITIONS

- (1) Store the panel or module in a dark place where the temperature is $23\pm5^{\circ}\text{C}$ and the humidity is below $50\pm 20\%\text{RH}$.
- (2) Store in anti-static electricity container.
- (3) Store in clean environment, free from dust, active gas, and solvent.
- (4) Do not place the module near organics solvents or corrosive gases.
- (5) Do not crush, shake, or jolt the module.

14.3 HANDLING PRECAUTIONS

- (1) Avoid static electricity which can damage the CMOS LSI.
- (2) The polarizing plate of the display is very fragile. So, please handle it very carefully.
- (3) Do not give external shock.
- (4) Do not apply excessive force on the surface.
- (5) Do not wipe the polarizing plate with a dry cloth, as it may easily scratch the Surface of plate.
- (6) Do not use ketonic solvent & Aromatic solvent, use with a soft cloth soaked with a cleaning naphtha solvent.
- (7) Do not operate it above the absolute maximum rating.
- (8) Do not remove the panel or frame from the module.
- (9) When the module is assembled, it should be attached to the system firmly, Be careful not to twist and bend the module.
- (10) Wipe off water droplets or oil immediately . If you leave the droplets for a long time, staining and discoloration may occur.
- (11) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth.
In case of contact with hands, legs or clothes, it must be washed away thoroughly with soap.

14.4 WARRANTY

- (1) Acceptance inspection period. The period is within one month after the arrival of contracted commodity at the buyer's factory site.
- (2) Applicable warrant period. The period is within 12 months since the date of shipping out under normal using and storage conditions.



■ Inspection Specifications

The buyer (customer) shall inspect the modules within twenty calendar days since the delivery date (the "inspection period") at its own cost. The results of the inspection (acceptance or rejection) shall be recorded in writing, and a copy of this writing will be promptly sent to the seller.

The buyer may, under commercially reasonable reject procedures, reject an entire lot in the delivery involved if, within the inspection period, such samples of modules within such lot show an unacceptable number of defects in accordance with this incoming inspection standards, provided however that the buyer must notify the seller in writing of any such rejection promptly, and not later than within three business days of the end of the inspection period.

Should the buyer fail to notify the seller within the inspection period, the buyer's right to reject the modules shall be lapsed and the modules shall be deemed to have been accepted by the buyer.

■ Warranty

AHS warrants to you, the original purchaser, that each of its products will be free from defects in materials and workmanship for one year from the date of purchase.

AHS will be limited to replace or repair any of its module which is found and confirmed defective electrically or visually when inspected in accordance with AHS general module inspection standard.

This warranty does not apply to any products which have been on customer's production line, repaired or altered by persons other than repair personnel authorized AHS, or which have been subject to misuse, abuse, accident or improper installation. AHS assumes no liability under the terms of this warranty as a consequence of such events.

If an AHS product is defective, it will be repaired or replaced at no charge during the warranty period. For out-of-warranty repairs, you will be billed according to the cost of replacement materials, service time and freight. In returning the modules, they must be properly packaged with original package; there should be detailed description of the failures or defect.

■ RMA

Products purchased through AHS and under warranty may be returned for replacement. Contact sales@advancehightech.com for RMA number and procedures.

Office Locations



Advance Hightech Solutions

Material Pioneer, Technology Navigator

Advance Hightech Solutions Inc.

www.advancehightech.com

sales@advancehightech.com

Office: +1 510 4719900

Cell: +1 512 9818493

Address: 24301 Southland Drive, Suite B9, Hayward
CA 94545, USA



Wah Lee Industrial Corp

Material Pioneer · Technology Navigator

Wah Lee Industrial Corp.

www.wahlee.com

katrina@wahlee.com

neko.huang@wahlee.com

Office: +886 03 6205899 ext. 23578

Cell: +886 975723578

Address: 18F, No.8, Zihciang S. Rd., Jhubei,
Hsinchu 302, Taiwan, R.O.C.

